DESCRIPTION	DIM L	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G	DIM H
H9700 72"	72.00	55.00	72.00	55.00	123.00	195.00	29.25	30.75	12.50
H9700 73"	73.00	55.50	73.00	55.50	124.00	197.00	29.25	30.75	12.50
H9700 81"	81.00	59.50	81.00	59.50	132.00	213.00	33.50	34.75	16.50

NOTE: 1" = 25.4 MM

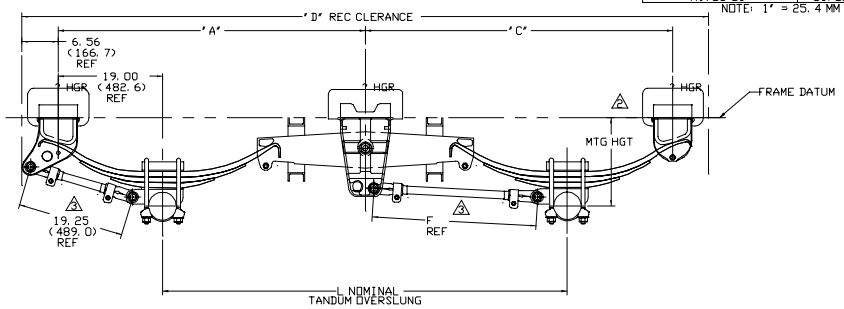

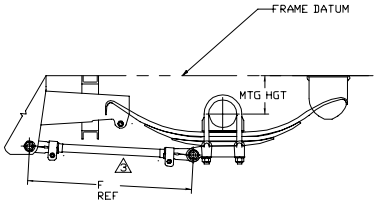

UNDERSLUNG OPTION – ALL AXLES

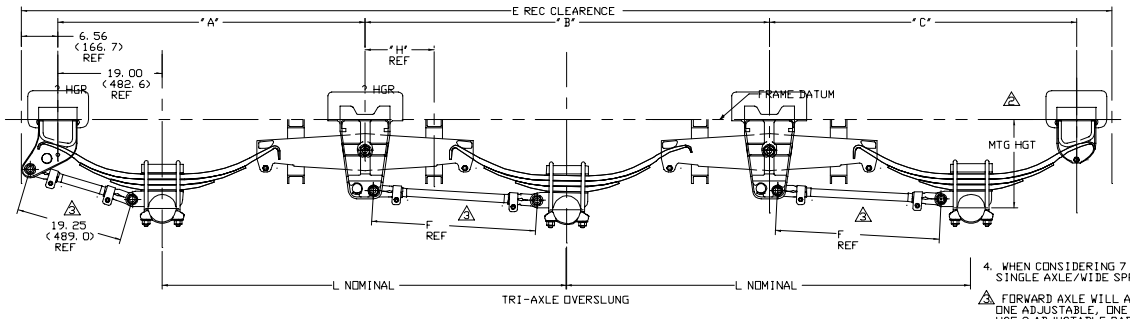

TRI-AXLE OVERSLUNG

4. WHEN CONSIDERING 7 AND 8 LEAF SPRINGS, USE THE SINGLE AXLE/WIDE SPREAD SPRINGS; 751-06, 752-02/06.

3 FORWARD AXLE WILL ALWAYS USE 19.25 (489.0) LONG RADIUS RODS, ONE ADJUSTABLE, ONE NON-ADJUSTABLE. REMAINING AXLE(S) USE 2 ADJUSTABLE RADIUS RODS, LENGTHS AS SHOWN.

2 FOR MOUNTING HEIGHT FEFER TO HUTCHENS CATALOG.

1 REFER TO HUTCHENS INSTALLATION INSTRUCTIONS FOR HANGER & SEAT INSTALLATION.

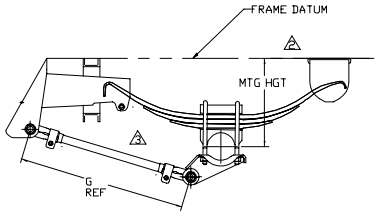

NO-HOP OPTION – REAR AXLE ONLY
REMAINING AXLES ARE OVERSLUNG

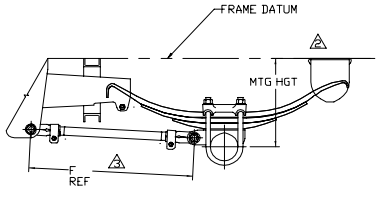

INVERTED U BOLT

ER NO

XX/XX XXX CHK APPD

CAU 03/26/99
CHK XX/XX/XX
APPD XX/XX/XX
MFG XX/XX/XX
XXXX XX/XX/XX
REC#XXX-XX
PROJ#XX-XXXX

NEXT

LAYOUT DRAWING
H9700 72" & 73" & 81"
WB 5"RD AXLE

D SIZE-1/8
B SIZE-1/16

1 1

939012-02

939012-02

1 1